


# DATI TECNICI VUOTOSTATO "XV600"

## TECHNICAL DATA VACUUMSWITCH "XV600"

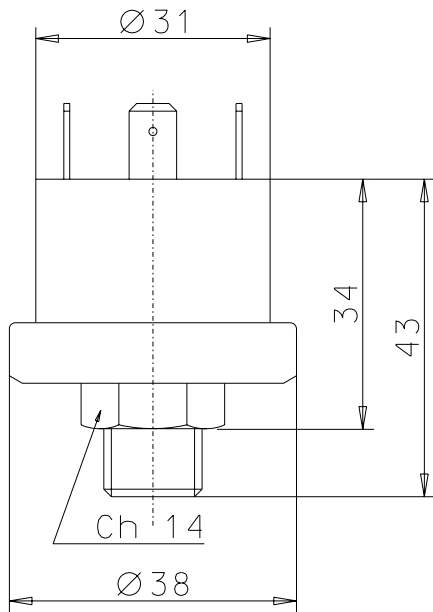


### CARATTERISTICHE COSTRUTTIVE

ATTACCO AL PROCESSO - ottone  
 FILETTATURE - 1/8 - 1/4 ISO228/ISO7  
 CALOTTA - tecnopolimero (PET)  
 MEMBRANA E TENUTA - AISI316 e silicone  
 GRADO DI PROTEZIONE - IP00  
 REGOLAZIONE - con vite  
 INTERVENTO ELETTRICO - SPDT 10(2)-250Vac  
   SPST-NC 10(2)-250Vac  
   SPST-NO 10(2)-250Vac  
 CONNESSIONE ELETTRICA - fast-on 6,3x0,8  
 TEMPERATURA AMBIENTE - T125°C  
 PRESSIONE DISCOPIO - maggiore di 20 bar  
 DERIVA TERMICA - 0,04 bar ogni 10°C rispetto alla  
   temperatura di 20°C

### CONSTRUCTION FEATURES

PRESSURE CONNECTION - brass  
 THREAD - 1/8 - 1/4 ISO228/ISO7  
 MAIN BODY - tecnopolymer (PET)  
 MEMBRANE AND SEALING - AISI316 and silicon  
 PROTECTION DEGREE - IP00  
 ADJUSTMENT - by screw  
 ELECTRIC INTERVENTION - SPDT 10(2)-250Vac  
   SPST-NC 10(2)-250Vac  
   SPST-NO 10(2)-250Vac  
 ELECTRIC CONNECTION - terminal 6,3x0,8  
 ADMITTED TEMPERATURE - T125°C  
 BURST PRESSURE - higher than 20 bar  
 THERMIC DRIFT - 0,04 bar for 10°C with respect  
   to temperature of +20°C

Collegamenti e schemi elettrici  
Connections and electric plants

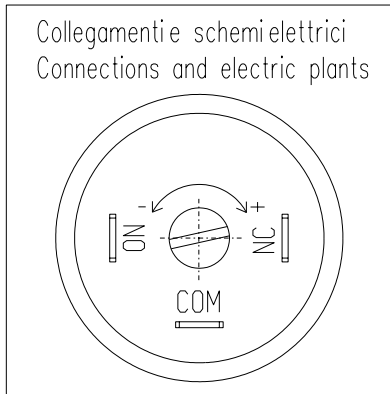

MODELLO TYPE	CAMPO DIREGOLAZIONE SETTING INTERVAL	PRESS. PROVA TEST PRESSURE	DIFFERENZIALE FISSO FIX DIFFERENTIAL
XV600	-150 ÷ -1000 mbar	-1000 mbar	150 ± 50 mbar

Omologazioni: EN60730-1 e EN60730-2-6

Homologations: EN60730-1 and EN60730-2-6

